

509,658

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau




(43) International Publication Date  
16 October 2003 (16.10.2003)

PCT

(10) International Publication Number  
**WO 03/085231 A1**

- (51) International Patent Classification<sup>7</sup>: **E21B 10/56** (74) Agent: CARLSSON Lars-Åke; Sandvik AB, Intellectual Property, S-811 81 Sandviken (SE).
- (21) International Application Number: PCT/SE03/00494
- (22) International Filing Date: 26 March 2003 (26.03.2003) (81) Designated States (*national*): AT, AU, CA, CN, DE, FI, GB, IN, JP, KR, RU, SE, US, ZA.
- (25) Filing Language: English
- (26) Publication Language: English (84) Designated States (*regional*): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).
- (30) Priority Data: 0201034-6 4 April 2002 (04.04.2002) SE
- (71) Applicant (for all designated States except US): SANDVIK AB [SE/SE]; S-811 81 Sandviken (SE). Published:  
— with international search report
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): BJÖRK, Fredrik [SE/SE]; Västanbygatan 18, S-811 32 Sandviken (SE). For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: PERCUSSION DRILL BIT AND A BUTTON THEREFOR

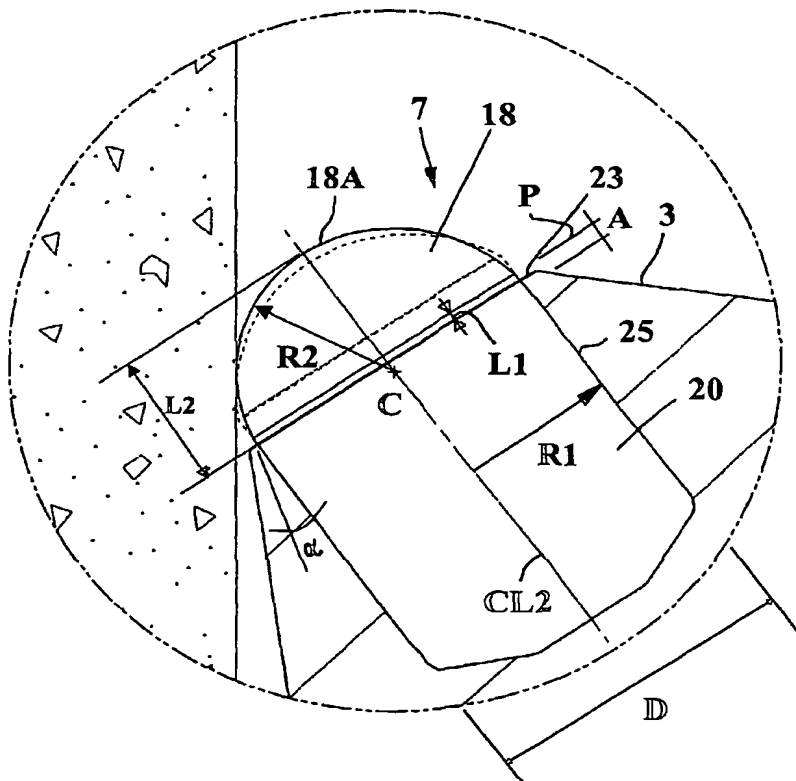

(57) Abstract: A percussion drill bit for drilling a bore, comprising a drill body having a connecting section at a rear end thereof for connection to a percussive unit and defining a rotational axis (CL1) of the drill bit, and a plurality of cemented carbide buttons (7, 9, 10) embedded in a front end of the drill body. The front end being rigid with respect to the connecting section. Each button comprises a cemented carbide body having a rear mounting portion (20) embedded in the drill body, and a front end (18) protruding from the drill body. The front end of the cemented carbide button is substantially semi-spherically curved and defined by a radius (R2). An origin (C) of the radius is disposed axially rearwardly of a plane (P) defines the largest diameter (D) of the button. The button projects from the drill bit body a distance (L2), which is not less than 50 % of the button diameter (D). A conical intermediate surface (21) forms, in cross-section, an acute angle ( $\alpha$ ) of about 13-19° with the envelope surface (25) of the rear mounting portion (20). The present invention also relates to the button itself, i.e. a cemented carbide button for use in a percussive drill bit.

WO 03/085231 A1

## PERCUSSION DRILL BIT AND A BUTTON THEREFOR

### TECHNICAL BACKGROUND

The present invention relates to a percussion drill bit for drilling bores in rock. A typical percussion drill bit comprises a steel drill body, means at one end of the drill body for connecting the bit to a percussive unit such as a drill string for a jack hammer or a down-the-hole hammer, and a plurality of buttons embedded in the other end of the drill body. The present invention also relates to a regrindable button for use in said drill bit.

Each button comprises a cemented carbide body having a rear mounting portion embedded in the drill body and a front end protruding from the drill body.

Known drill bits that are provided with non-enhanced cemented carbide buttons such as disclosed in EP-B1-886 715 have disadvantages in that they wear prematurely and have slow penetration rates. Furthermore regrinding of conventional buttons becomes unstable. Other known drill bits are shown in US-A-3,788,409 and US-A-6,220,376.

### OBJECTS OF THE INVENTION

An object of the present invention is to provide a drill bit for percussive drilling, wherein the life of the bit is extended.

Another object of the present invention is to provide a drill bit for percussive drilling with an increased penetration rate.

Still another object of the present invention is to provide a regrindable cemented carbide button for percussive drilling, which makes the pressing tool more durable.

Still another object of the present invention is to provide a regrindable cemented carbide button for percussive drilling, which button can be reground in a stable manner.

### DESCRIPTION OF THE DRAWINGS

The objects and advantages of the invention will become apparent from the following detailed description of a preferred embodiment thereof in connection with

the accompanying drawing in which like numerals designate like elements, and in which:

Fig. 1A shows a partial perspective view illustrating a drill bit according to the present invention;

5 Fig. 1B shows a cross-sectional view of the drill bit in Fig. 1A according to the line I-I.

Fig. 2 shows a sectional view of a button according to the present invention, in relation to a drill bit body, and a prior art geometry shown in dashed lines;

Fig. 3 shows a button according to the present invention in longitudinal section.

Fig. 4 shows a side elevational view of a button according to the present invention;

10 and

Fig. 5 shows a side elevational view of a prior art button.

#### DETAILED DESCRIPTION OF A PREFERRED EMBODIMENT OF THE INVENTION

15 In Figs. 1A and 1B a rock drill bit is shown, which in a usual manner comprises a body and cemented carbide buttons. The body comprises a substantially cylindrical head portion 1 and a more slender shaft 2. The body of the drill bit is made of steel. The head portion 1 comprises a front surface or a front side designated with 3, in which a number of buttons are mounted. The front surface may be substantially  
20 planar. A first surface portion 6, located between the front surface 3 and the periphery of the head portion, is conically shaped. On this conical surface 6 are provided a number of first buttons or gauge row buttons 7 forming a peripheral ring on the head portion. The buttons 7 in this case project somewhat outside the periphery of the head portion in order to machine a hole during drilling which has a  
25 somewhat bigger diameter than the very head portion. Chipways or recesses 8 are provided in areas between adjacent peripheral buttons 7, through which flush medium can pass. A number of front buttons are provided also in the area located inside the peripheral buttons 7, which depending on their position, are designated by numerals 9 and 10, respectively. The rock drill bit is to be coupled to a drill tube or a  
30 drill rod in a drill string by means of a threaded connection, not shown, or to a driver sub of a down-the-hole hammer, not shown, so as to transfer rotational movement in the usual manner. The tube or rod includes a channel for conveying a flush medium.

A main channel 11 for flush medium is provided inside the drill bit. This main channel communicates at its forward end with a number of branch channels 12, which terminate in recesses 4 in the front surface 3 and in return grooves 5. In this connection it may be noted that one or more flush medium channels also can terminate in the chipways 8. The flush medium will in practice be water or air.

A number of un-coated buttons 7, 9 and 10 is provided in the conical surface 6 and in the front surface 3 of the drill body. The buttons are completely made of cemented carbide and secured in borings preferably by press fit. A number of buttons 7 is positioned at the periphery of the bit 10, the radially outer portions of which define the diameter of the bit and thus the diameter of the bore being drilled. At least each row button 7 when mounted projects a maximum distance L2 from the associated rim surface 23 of the bit body 2 (Fig. 2). The distance L2 is large in comparison with the prior art button as shown as a dashed line in Fig. 2, i.e. about 53% of the button diameter D to compare with 49% for the prior art button. In other words in accordance with the present invention the distance L2 is not less than 50 % of the button diameter D, preferably it's not less than 52%.

The buttons 7 are tilted in such a way, that a longitudinal centerline (center axis) CL2 of each button 7 diverges by a preferably acute angle from the longitudinal center axis CL1 of the drill bit in a forward direction of the bit.

All buttons 7, 9 and 10 are embedded in the front surface of the drill body. Each button comprises a non-enhanced cemented carbide body having a cylindrical grip or mounting portion 20 embedded in the drill body and a front converging end protruding from the drill body. A radius R1 defines the envelope surface 25 of the mounting portion 20. The converging end of each cemented carbide button defines the cutting end 18 of the button. The surface 18A of the cutting end 18 starts from an edge 22 substantially lying in a plane P, see Fig. 2. The edge 22 is preferably disposed at a junction between a conical intermediate surface 21 of the cemented carbide button, and the cylindrical envelope surface 25. The conical intermediate surface 21 forms in the cross-section of Fig. 2 an acute angle  $\alpha$  of about 13-19°, preferably about 15° with the envelope surface 25 of the rear mounting portion 20. The conical intermediate surface is there for pressing reasons when compacting the carbide and binder powder which makes the upper or lower punch in the pressing

tool more durable. The edge 22 is parallel with the associated rim surface 23 and they are spaced by the distance L1, which is in the magnitude of 0.5 to 2 mm.

The longitudinal centerline CL1 of the drill bit and the longitudinal centerline CL2 of the buttons 7 include an angle therebetween. The angle is in the range of about 13°-163°, preferably 20°-55°.

The surface 18A of the cutting end 18 of the button is substantially semi-spherically curved and defined by a radius R2 lying on the center axis CL2, and the origin C of the radius R2 is positioned axially rearwardly of the plane P. The plane P intersects the center axis CL2 at a point. The distance A between said point and the radius origin C is 5 to 10% of the radius R1. The radius R2 is about 85 % to 115 % of the radius R1 of the rear mounting portion 20.

Since the radius R2 of the semi-spherical cemented carbide front end is smaller than hitherto known buttons the new inventive drill bit will drill longer than prior art drill bits before regrinding is needed, i.e. there is be more cemented carbide in the cutting end 18 of the inventive cemented carbide button (compare the dashed line in Fig. 2). Furthermore, the drill bit will achieve an increased penetration rate due to the higher contact pressure that each button exerts on the rock surface in the borehole. In addition, the inventive cemented carbide button can be reground in a stable manner since the button projects from the steel bit body more than usual and thus the grinding recess of a grinding cup will be made deeper than previous cups. The grinding cup will thus have a substantially semi-spherical recess adapted to grind the button, which recess has a depth which is not less than 50 % of the largest diameter of the recess and preferably not less than 52%. The radius of the semi-spherical recess is about 85 % to 115 % of the radius R1 of the rear mounting portion 20. With the term "regrindable" is here meant that a single grinding cup rotating and orbiting on the button end can substantially restore the original shape of the button end.

Tests have shown that during percussive drilling the duration of life of the inventive bit was twice the life of conventional bits. The diameters of the buttons of said inventive bits were chosen such that the largest buttons 7 were located at the periphery and the inner buttons 9 were smaller while the innermost buttons 10 were smallest in diameter. The projections from the rim surfaces 23 varied in a similar way, i.e. from 9.4 mm to 8.6 mm and 7.6 mm, respectively.

Furthermore, the shape of the button according to the present invention gives a freedom for the drill bit designer in that the present button can be mounted in the drill bit at an inclination angle within an interval of about 150° starting from about 13° relative to the bit axis CL1.

5       The geometry of the button according to the present invention provides numerous advantages as compared with prior buttons such as extended life, increased penetration rate and stable regrinding.

10       Although the present invention has been described in connection with preferred embodiments thereof, it will be appreciated by those skilled in the art that additions, deletions, modifications, and substitutions not specifically described may be made without departing from the spirit and scope of the invention as defined in the appended claims.

CLAIMS

1. A percussion drill bit for drilling a bore, comprising a drill body having a connecting section at a rear end thereof for connection to a percussive unit and defining a rotational axis (CL1) of the drill bit, and a plurality of regrindable cemented carbide buttons (7,9,10) embedded in a front end of the drill body, said front end being rigid with respect to the connecting section, each button comprising a cemented carbide body having a rear mounting portion (20) embedded in the drill body, and a front end (18) protruding from the drill body, wherein the front end of the cemented carbide button is substantially semi-spherically curved and defined by a radius (R2), an origin (C) of the radius (R2) being disposed axially rearwardly of a plane (P) substantially containing an edge (22), said front end having a surface (18A) which starts at said edge (22),

characterized in that the button (7,9,10) projects from the drill bit body a distance (L2) which is not less than 50 % of the button diameter (D) and in that a conical intermediate surface (21), between said surface (18A) and said edge (22), forms, in cross-section, an acute angle ( $\alpha$ ) of about 13-19° with the envelope surface (25) of the rear mounting portion (20).

2. A drill bit according to claim 1, wherein the distance (L2) is not less than 52% of the button diameter (D).

3. A drill bit according to claim 2, wherein the curved front end (18) of the cemented carbide button connects to a conical surface (22) which in turn connects to the envelope surface (25) of the button (7,9,10) at a location containing a plane (P) defining the largest diameter (D) of the button.

4. A drill bit according to claim 1, wherein the radius (R2) is about 85 % to 115 % of the radius (R1) of the rear mounting portion (20).

5. A regrindable cemented carbide button for a percussive rock drill bit having a rear mounting portion (20) to be embedded in a drill body, and a front end (18) protruding

from the drill body, wherein the front end (18) of the cemented carbide button is substantially semi-spherically curved and defined by a radius (R2), an origin (C) of the radius (R2) being disposed axially rearwardly of a plane (P) substantially containing an edge (22), said front end having a surface (18A) which starts at said edge (22), characterized in that the button is adapted to project from the drill bit body a distance (L2) which is not less than 50 % of the button diameter (D) and in that a conical intermediate surface (21), between said surface (18A) and said edge (22), forms, in cross-section, an acute angle ( $\alpha$ ) of about 13-19° with the envelope surface (25) of the rear mounting portion (20).



6. The regrindable button according to claim 5, wherein the distance (L2) is not less than 52% of the button diameter (D).

7. The regrindable button according to claim 6, wherein the curved front end (18) of the cemented carbide button connects to a conical surface (22) which in turn connects to the envelope surface (25) of the button (7,9,10) at a location containing a plane (P) defining the largest diameter (D) of the button.

8. The regrindable button according to claim 5, wherein the radius (R2) is about 85 % to 115 % of the radius (R1) of the rear mounting portion (20).



1/3

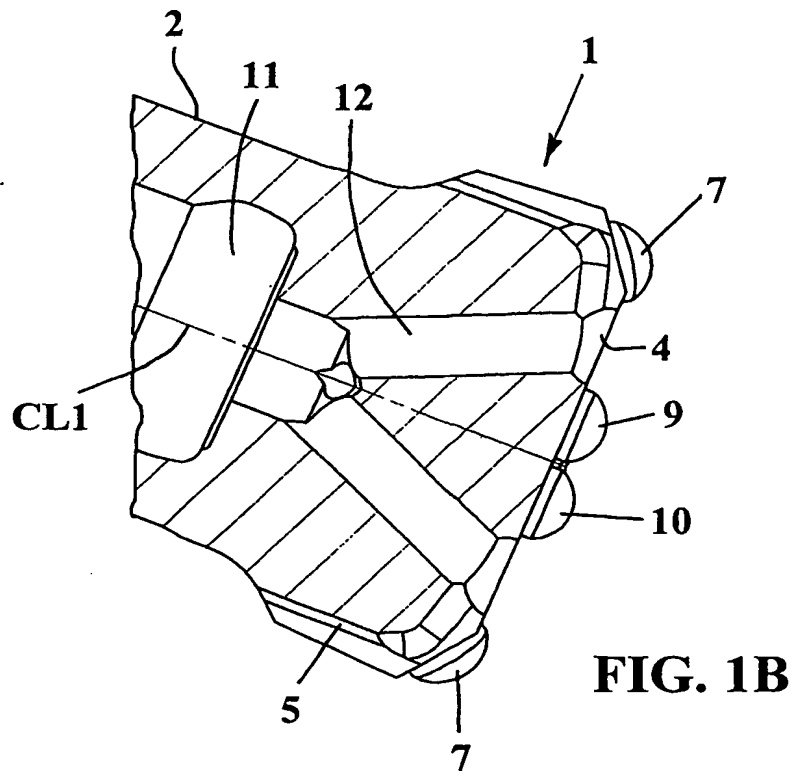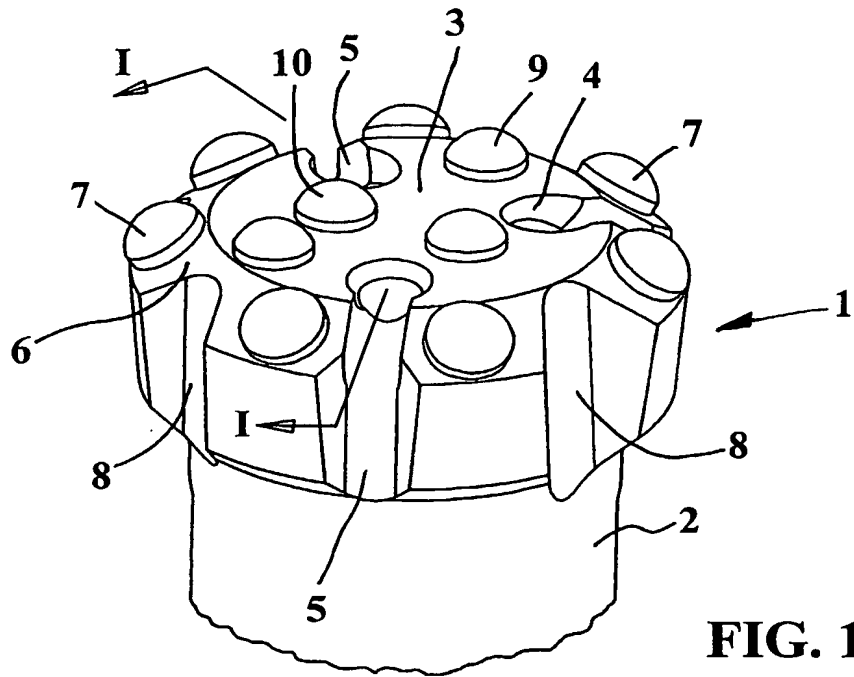

2/3

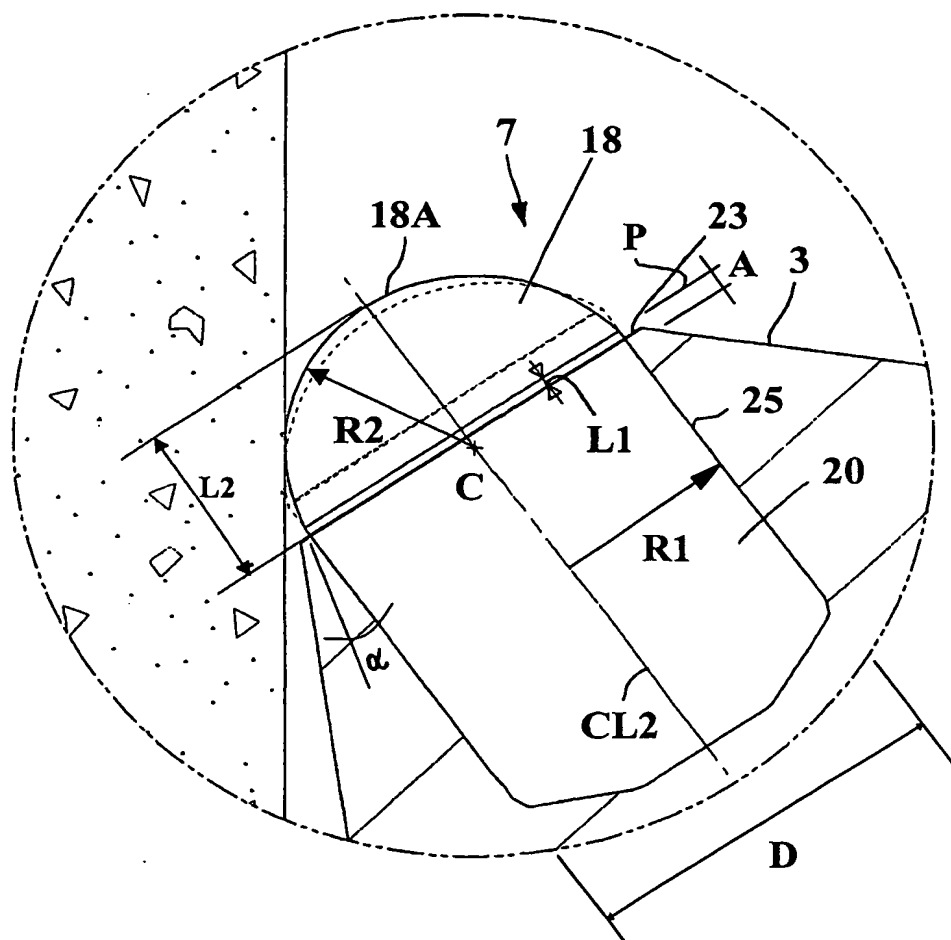


FIG. 2

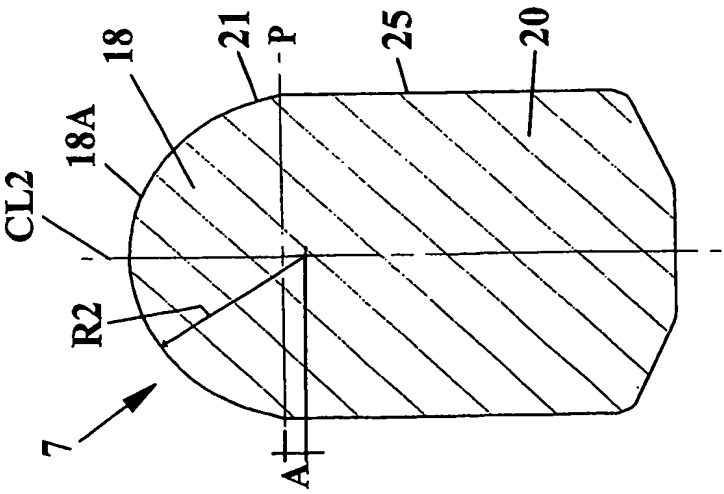


FIG. 3

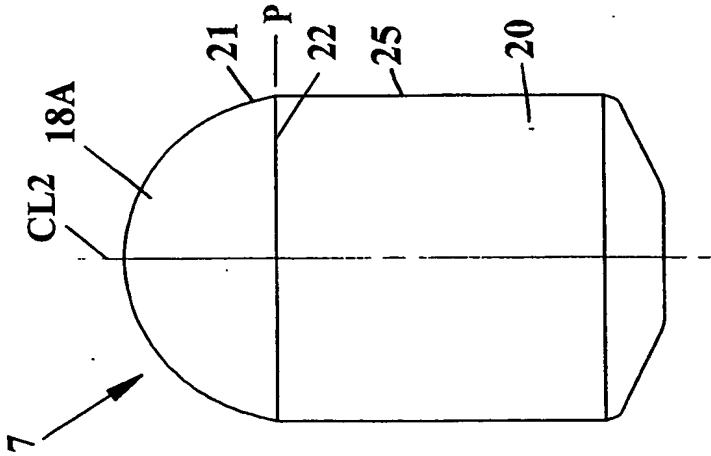


FIG. 4

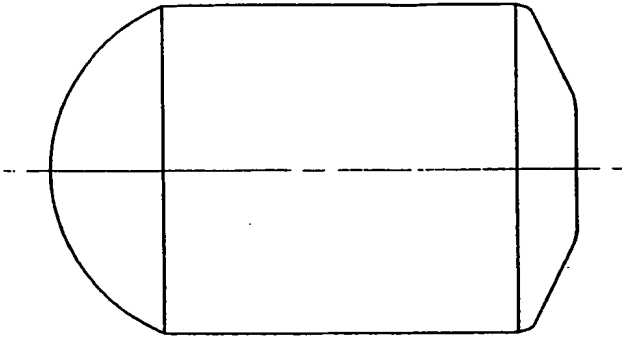


FIG. 5

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/03/00494

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: E21B 10/56

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: E21B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3788409 A (CURINGTON), 29 January 1974 (29.01.74) --	1-8
A	US 6220376 B1 (LUNDELL), 24 April 2001 (24.04.01) --	1-8
A	US 4598779 A (LILJEKVIST ET AL), 8 July 1986 (08.07.86) --	1-8
A	US 4296825 A (LARSSON), 27 October 1981 (27.10.81) -- -----	1-8

☐ Further documents are listed in the continuation of Box C.
 ☒ See patent family annex.

\* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

19 June 2003

Date of mailing of the international search report

23-06-2003

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Authorized officer

Christer Bäcknert / JA A  
Telephone No. +46 8 782 25 00

## INTERNATIONAL SEARCH REPORT

Information on patent family members

02/06/03

International application No.

PCT/JP03/00494

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
US	3788409	A	29/01/74	AU	467016 B	13/11/75
				AU	5529973 A	07/11/74
				CA	968785 A	03/06/75
				GB	1418984 A	24/12/75
				ZA	7300720 A	31/10/73
-----						
US	6220376	B1	24/04/01	SE	9803997 A	21/05/00
-----						
US	4598779	A	08/07/86	AT	27846 T	15/07/87
				AU	562686 B	18/06/87
				AU	3290684 A	28/03/85
				BR	8404669 A	06/08/85
				CA	1221681 A	12/05/87
				DE	3464274 D	00/00/00
				EP	0140849 A,B	08/05/85
				FI	78966 B,C	30/06/89
				FI	843586 A	21/03/85
				IE	55642 B	05/12/90
				IE	842375 L	20/03/85
				JP	1876134 C	07/10/94
				JP	5081713 B	15/11/93
				JP	60085186 A	14/05/85
				NO	163297 B,C	22/01/90
				NO	843731 A	21/03/85
				SE	452636 B,C	07/12/87
				SE	8305048 A	21/03/85
-----						
US	4296825	A	27/10/81	AT	369505 B	10/01/83
				AT	491180 A	15/05/82
				AU	542437 B	21/02/85
				AU	6232680 A	09/04/81
				BR	8006246 A	07/04/81
				CA	1126255 A	22/06/82
				DE	3036634 A	16/04/81
				ES	495478 A	01/06/81
				ES	8105815 A	01/09/81
				FI	803071 A	05/04/81
				FR	2466605 A,B	10/04/81
				GB	2059482 A,B	23/04/81
				GB	2099890 A,B	15/12/82
				IE	50509 B	30/04/86
				IE	802068 L	04/04/81
				IN	153606 A	28/07/84
				JP	5605992 A	23/05/81
				MX	6730 E	23/05/86
				NO	802934 A	06/04/81
				SE	440115 B,C	15/07/85
				SE	8006205 A	05/04/81
				ZA	8001931 A	25/03/81
-----						